



# Hot air gun Disassembly

Exploring design methods for an industrial tool

Written By: varunsanghvi2000



## INTRODUCTION

The target user for the tool is a professional who uses a heat for forming and bending a variety of materials.

## Step 1 — Overall structure



- All screws on one side for ease of assembly
- Wire has a stiffener for protection
- Switch is placed on handle in an ergonomic position so that one hand operation is easy
- The back of the handle and the back of the body are in a straight plane in order to place the gun in vertical position after operation to cool it down
- Vents are placed in the top part to facilitate air flow
- The product is colored in industrial orange to be easily visible and distinguishable from the work environment




## Step 2 — Plastic detailing




- All plastic detailing is made to have no overhangs
- screwing details are used in order to locate the two half together without external jig
- A lip joint is used in order to secure the assembly and also make it impermeable and rigid

## Step 3 — Electrical component placement

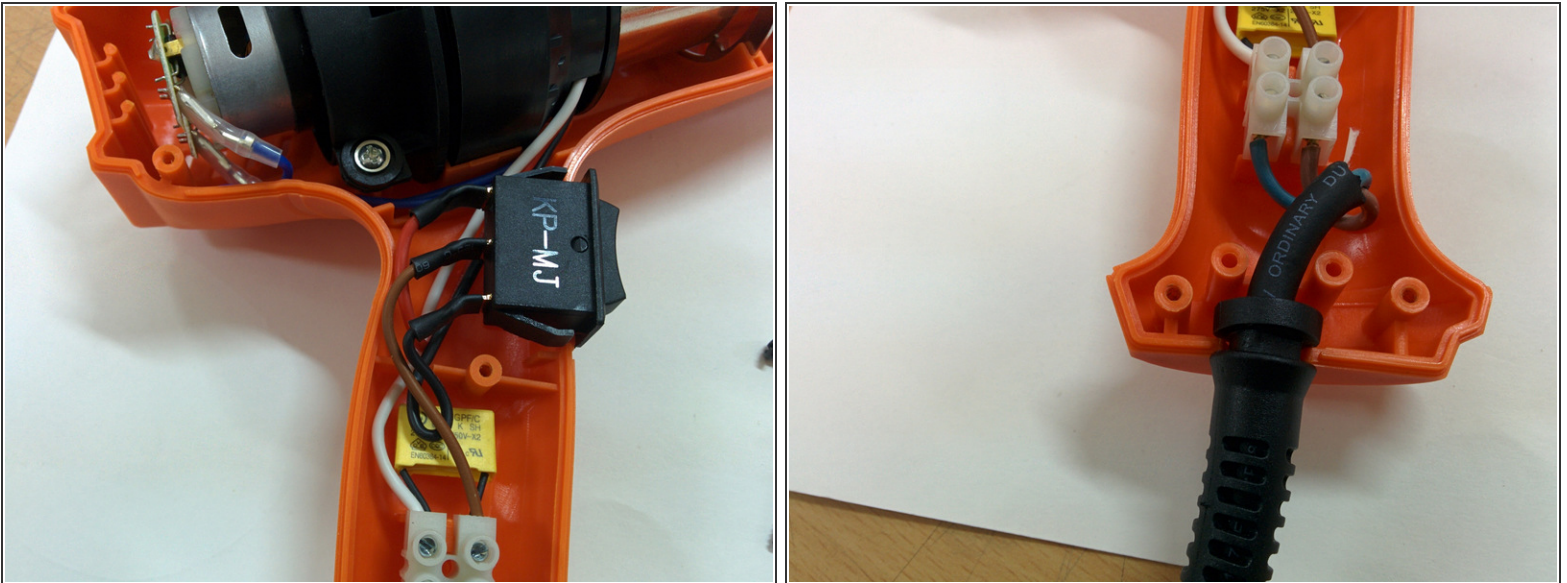



- All electrical components are connected using connectors instead of direct soldering to facilitate easy replacement
- The components have negative placers inbuilt in the in plastic injection mold
- The electrical components are placed in order to prevent shorting

## Step 4 — Heat component placements

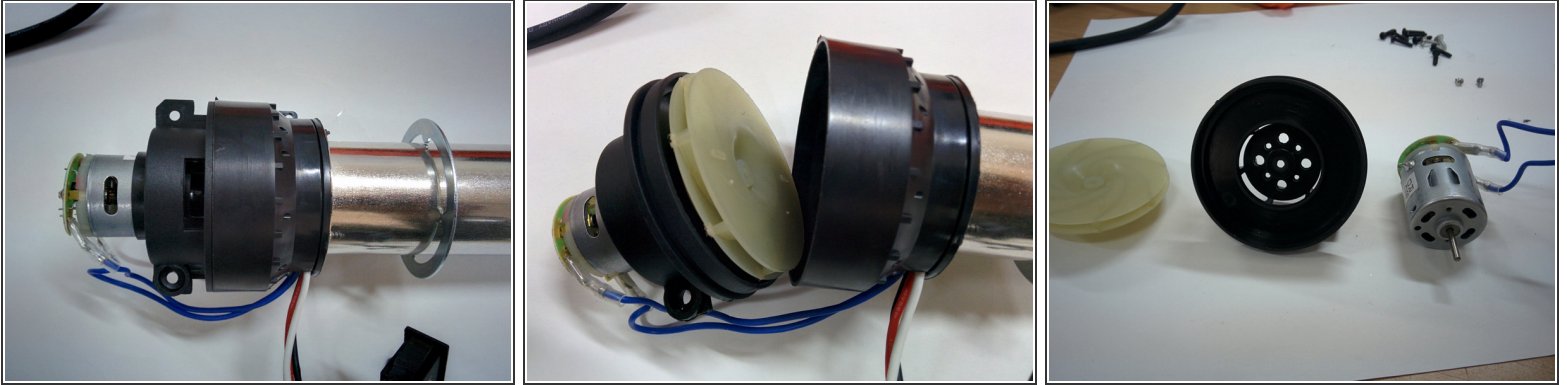

- All heat components are suspended in order to prevent the heated elements to come in contact with plastic parts
- The blower chamber is designed in heat resistant pet in order to prevent it from deformation
- The motor and the blower fan has a press fit


## Step 5 — Heat tube

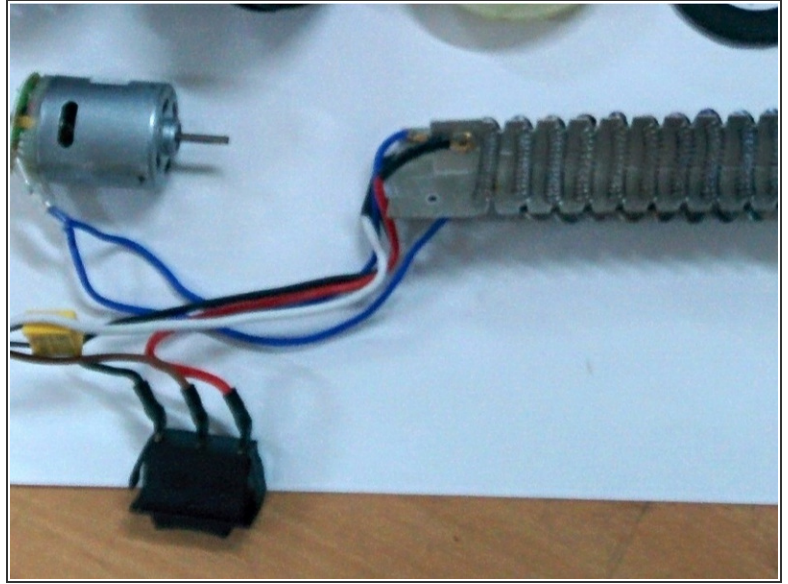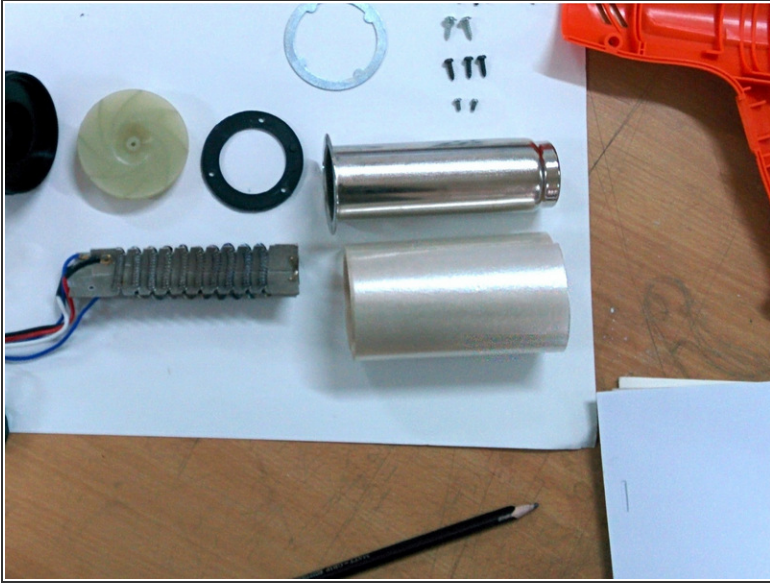

- The heat tube is using mica support and kapton insulation
- The external heat tube is stainless steel to prevent degradation of the tube.
- The heat coil is used as a resistor to step down voltage for motor and hence it has a dual perpose
- The heat coil is made of nichrome wire.



## Step 6 — Detail assembly

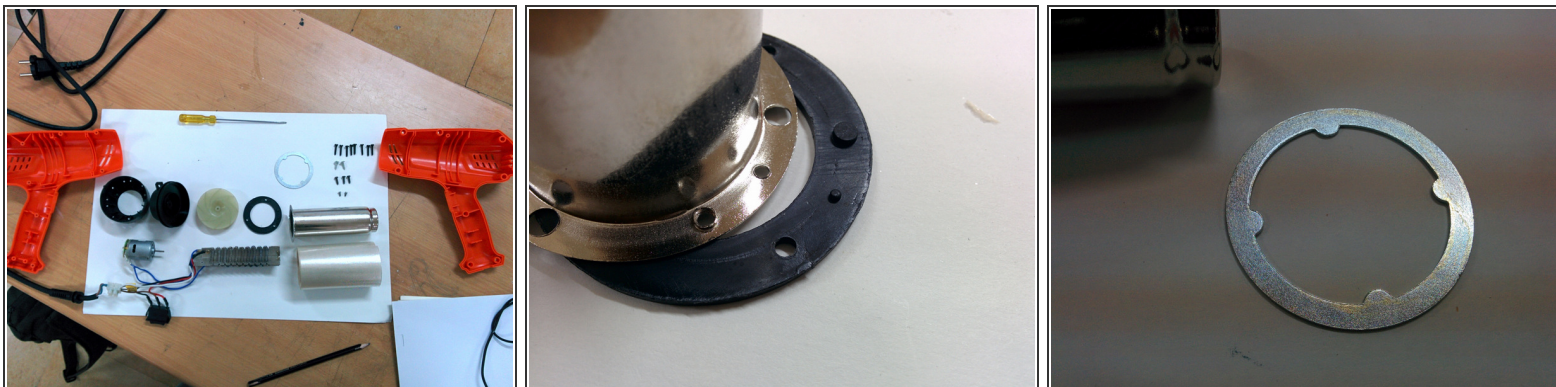

- Minimum number of screws (variety) are used and all screws are self tapping in order to eliminate the use of nuts and loose parts.
- Assembly has location pins to align circular parts in a fixed orientation.
- Heat rings are used in order to over heating

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-14 11:03:34 PM.